


Pin

Design:
Margherita Rui

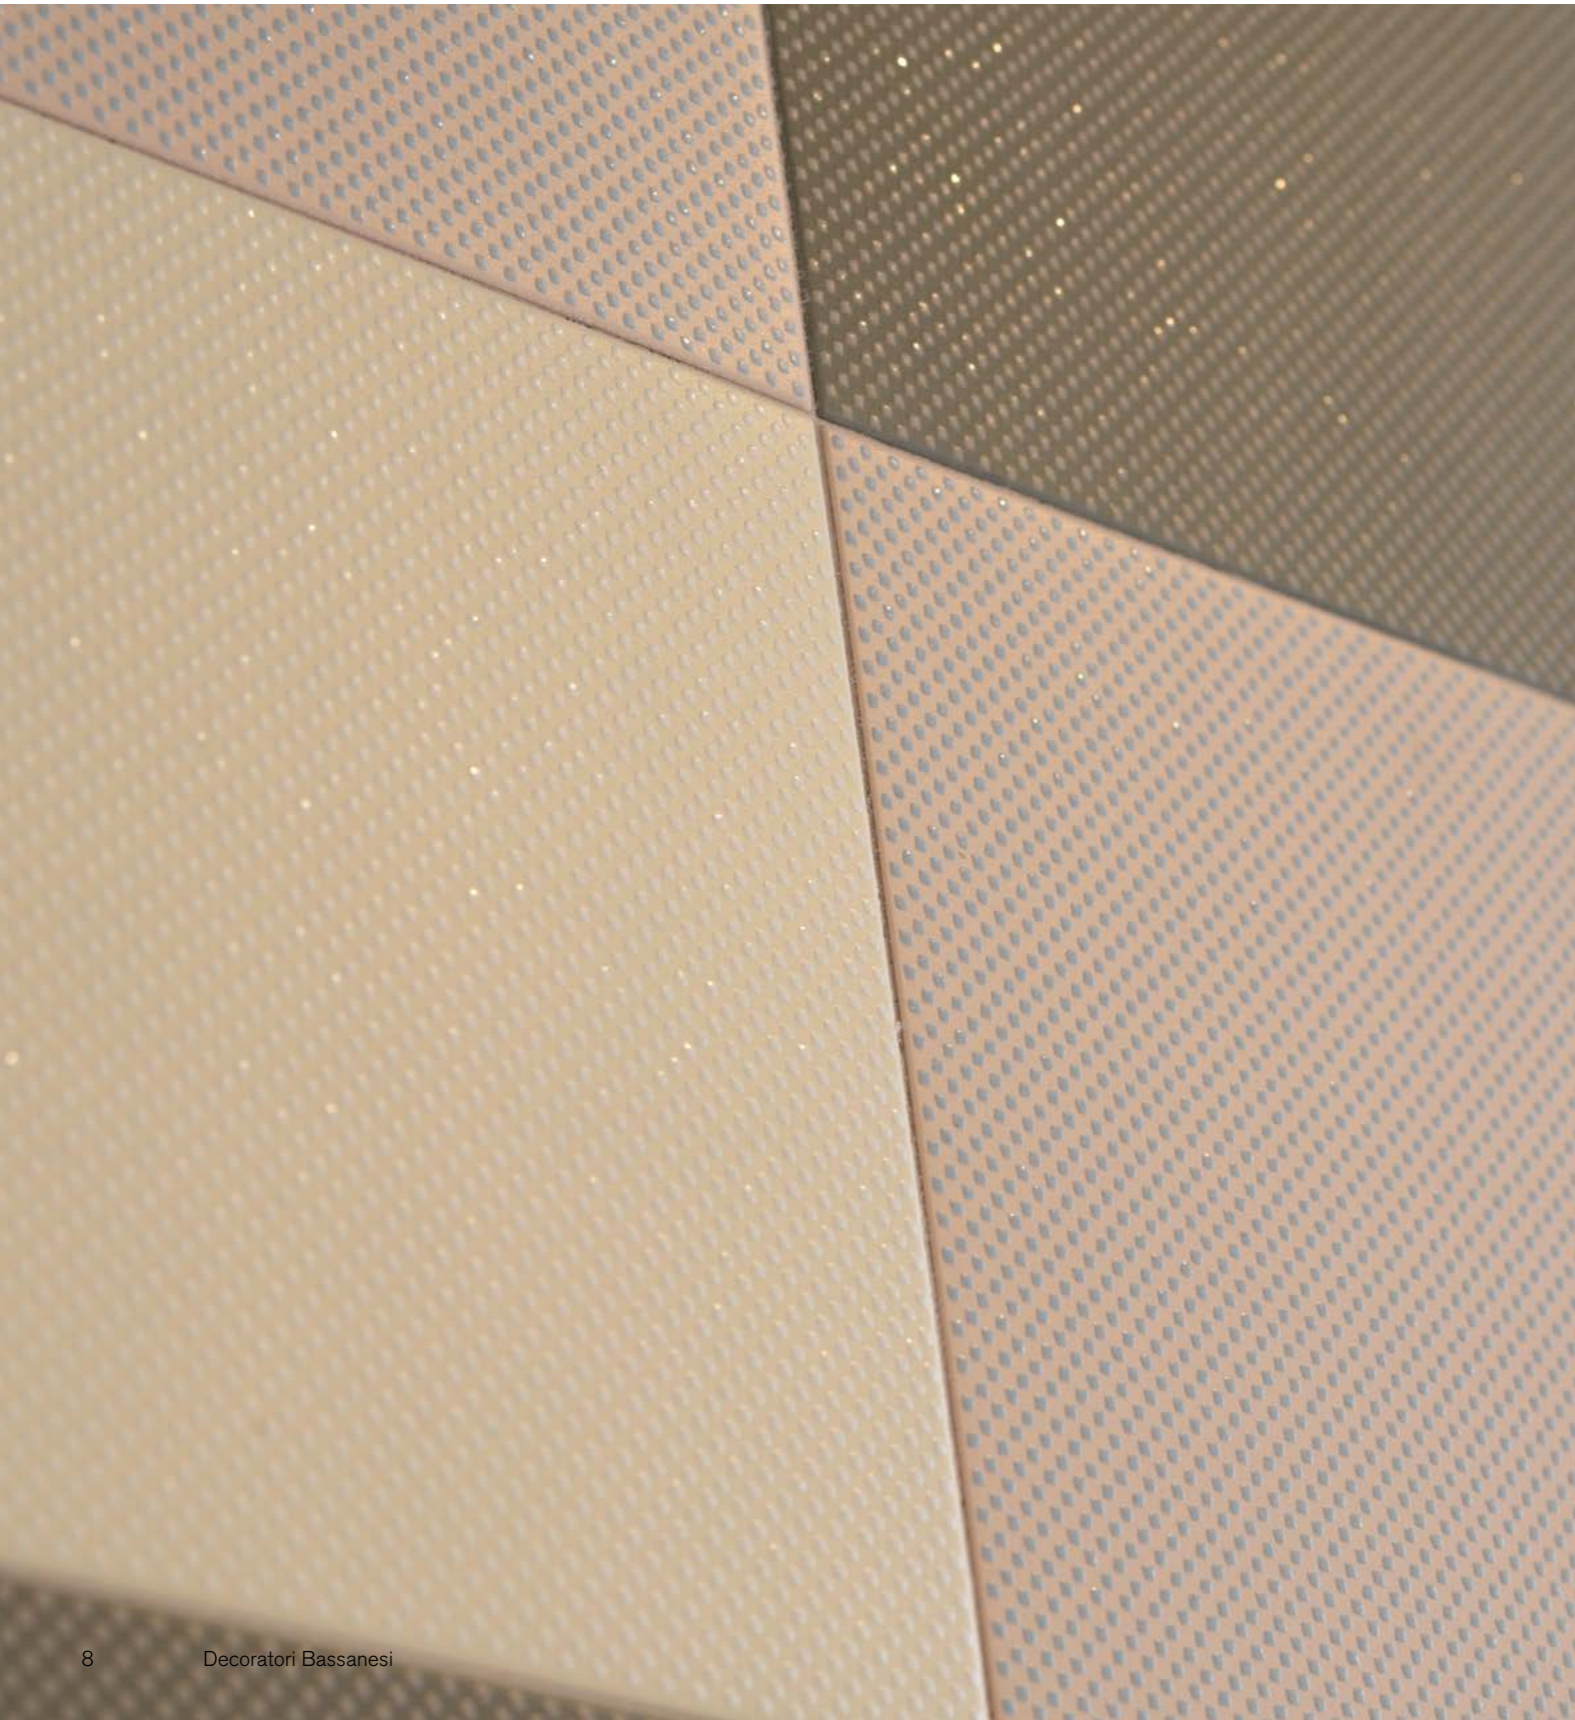


Caratteristiche tecniche Pin

Technical specifications / caractéristiques techniques / technische eigenschaften / технические характеристики

Gres Porcellanato smaltato - Porcelain gres Glazed - Grès porcelainé émaillé - Glasiertes Feinsteinzeug - керамогранит Эмалированная

ISO 13006 - UNI EN 14411 Annex G Bla GL

Spessore - Thickness 8,5 mm	CARATTERISTICHE TECNICHE TECHNICAL SPECIFICATIONS	METODI DI PROVA NORMA ISO STANDARD	VALORI PRESCRITTI DALLE NORME INTERNATIONAL STANDARDS UNI EN 14411 - ISO 13006	PRESTAZIONI PERFORMANCES
	LATI SIDES СТОРОНЫ	ISO 10545-2	± 0,6%	± 0,6%
	SPESSORE THICKNESS ТОЛЩИНА		± 5%	± 5%
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF EDGES ПРЯМОЛИНЕЙНОСТЬ КРОМОК		± 0,5%	± 0,5%
	ORTOGONALITÀ RECTANGULARITY ОРТОГОНАЛЬНОСТЬ		± 0,6%	± 0,5%
	PLANARITÀ SURFACE FLATNESS ПЛОСКОСТЬ		± 0,5%	± 0,5%
	ASSORBIMENTO D'ACQUA WATER ABSORPTION ПОГЛОЩЕНИЕ ВОДЫ	ISO 10545-3	≤ 0,5%	< 0,5%
	RESISTENZA ALLA FLESSIONE BENDING STRENGTH ПРОЧНОСТЬ НА ИЗГИБ	ISO 10545-4	≥ 35N/mm ²	≥ 35N/mm ²
	MODULO DI ROTTURA MODULUS OF RUPTURE МОДУЛЬ РАЗРУШЕНИЯ	ISO 10545-4	> 1300N (sp. ≥ 7,5mm)	≥ 1300N
	RESISTENZA ALL'ABRASIONE SUPERFICIALE PER LE PIASTRELLE SMALTATE RESISTANCE TO SURFACE ABRASION FOR THE ENAMELED TILES СТОЙКОСТЬ К ПОВЕРХНОСТНОМУ ИСТИРАНИЮ ЭМАЛИРОВАННОЙ ПЛИТКИ	ISO 10545-7	-	DISPONIBILE SU RICHIESTA AVAILABLE ON REQUEST
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕПЛОВОГО РАСШИРЕНИЯ	ISO 10545-8	≤ 9X10 ⁻⁶ °c ⁻¹	≤ 9X10 ⁻⁶ °c ⁻¹
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS	ISO 10545-9	METODO DISPONIBILE AVAILABLE METHOD	RESISTE RESISTANT
	RESISTENZA AL GELO FROST RESISTANCE МОРОЗОСТОЙКОСТЬ	ISO 10545-12	METODO DISPONIBILE AVAILABLE METHOD ДОСТУПНЫЙ МЕТОД	RESISTE RESISTANT СТОЙКАЯ
	RESISTENZA AI PRODOTTI CHIMICI USO DOMESTICO E ADDITIVI PER PISCINA- RESISTANCE TO HOUSEHOLD AND SWIMMING POOL CHEMICAL PRODUCTS - СТОЙКОСТЬ К ДЕЙСТВИЮ БЫТОВЫХ ХИМИЧЕСКИХ СРЕДСТВ, ДОБАВКАМ В БАССЕЙНЫ	ISO 10545-13	min. B	CONFORME COMPLIANT УСТУПЧИВЫЙ
	RESISTENZA ALLE MACCHIE STAIN RESISTANCE СТОЙКОСТЬ К ОБРАЗОВАНИЮ	ISO 10545-14	minimum classe 3	CONFORME COMPLIANT УСТУПЧИВЫЙ
	RESISTENZA ALLO SCIVOLAMENTO SKID RESISTANCE	DIN 51130		R9

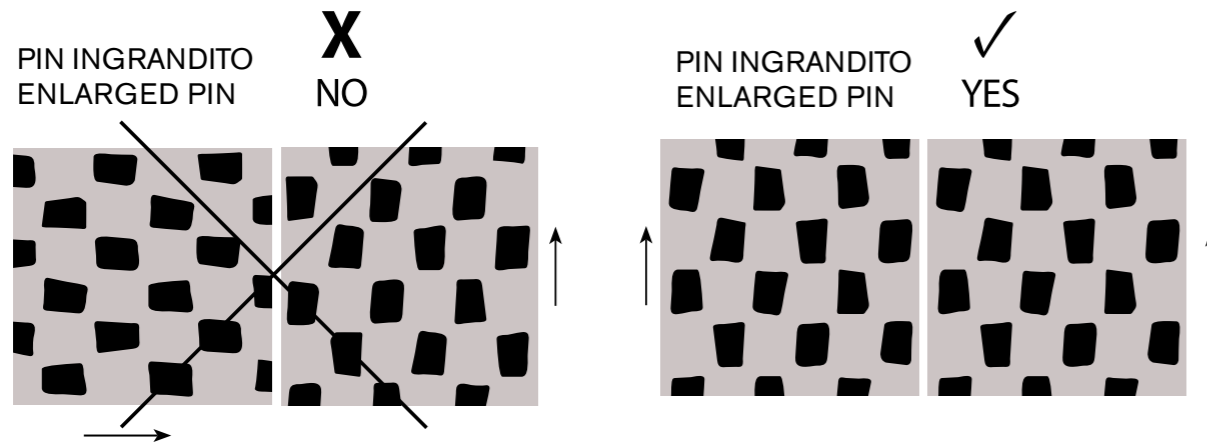

Per un risultato ottimale raccomandiamo di posare le lastre orientando la grafica sempre nella stessa direzione.
 For best results we recommend laying the slabs orienting always in the same direction.
 Pour une pose optimale il vous est conseillé de poser le matériel de manière à ce que la graphie se suive.
 Für ein optimales Ergebnis empfehlen wir, die Platten zu verlegen und die Grafiken in die gleiche Richtung auszurichten.
 Для получения оптимального результата рекомендуется укладывать плиты так, чтобы графика была всегда в одном и том же направлении.

Match

PIN	COLOURS		PIN INGRANDITO/ ENLARGED PIN
 Pin Royal Blue	 Colours Royal Blue	 Colours Iron	 Fondo Royal Blue Pin Iron
 Pin Marine Green	 Colours Marine Green	 Colours Beige	 Fondo Marine Green Pin Beige
 Pin Sand	 Colours Sand	 Colours Marine Green	 Fondo Sand Pin Marine Green
 Pin Light Grey	 Colours Light Grey	 Colours Pink	 Fondo Light Grey Pin Pink
 Pin Pink	 Colours Pink	 Colours Azure	 Fondo Pink Pin Azure
 Pin Beige	 Colours Beige	 Colours White	 Fondo Beige Pin White

Per ulteriori informazioni visita il nostro sito: www.decoratoribassanesi.it - For further information visit: www.decoratoribassanesi.it - Pour plus d'informations, visitez notre site : www.decoratoribassanesi.it - Für weitere Informationen besuchen Sie unsere Webseite: www.decoratoribassanesi.it - Для получения дополнительной информации посетите: www.decoratoribassanesi.it